


- for switching the external medium voltage lines to the values of rated power
- in compliance with: EN 60694, EN 60 694, (354205)EN 60 265-1

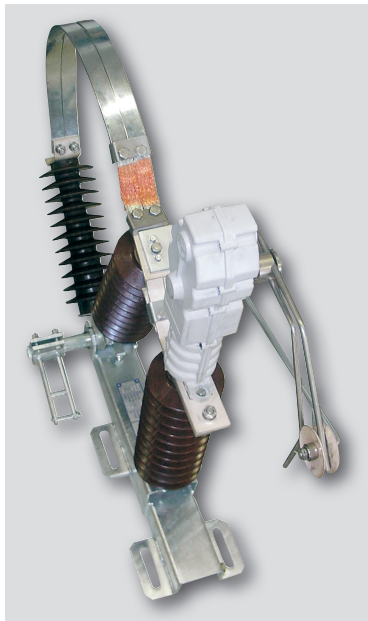

## TECHNICAL DATA

Rated voltage	25 kV, 38,5 kV
Rated current	400 A, 630 A, 1000 A
Rated dynamic current	40 kA
Rated short term current 1 s	16 kA
Capacitive release current	10 A
Release current of a non-loaded transformer	10 A
Maximum current induced at make	10 kA
Rated release current	400 A, 630 A, 1000 A
Mechanical durability	3000 ON/OFF cycles
Durability	30 years
Weight	32, 40 kg

## Switch disconnector OJC - Ž 38,5/400 - 10

